



Electric Roof Awning

Coolspace

Product Introduction




The TM-C features a non-segmented, full-cassette design that redefines durability standard. Unlike modular spliced structures, our high-strength unibody chassis provides superior sealing and structural integrity. When retracted, the fabric and the entire mechanical system are completely encapsulated within the sleek aluminum cassette and guide rails. This design creates a hermetic barrier against dust, mold, and environmental pollutants, keeping your system in good condition for years.

TM-C




Fabric is waterproof and sun-proof, easy to install, flexible to open and close, lowers indoor temperature and creates a comfortable living space

TM-C PRO


Supported by upright columns, sturdy and wind-resistant in structure, spliceable for large-area coverage, flexible in layout and free from restrictions of building wall positions

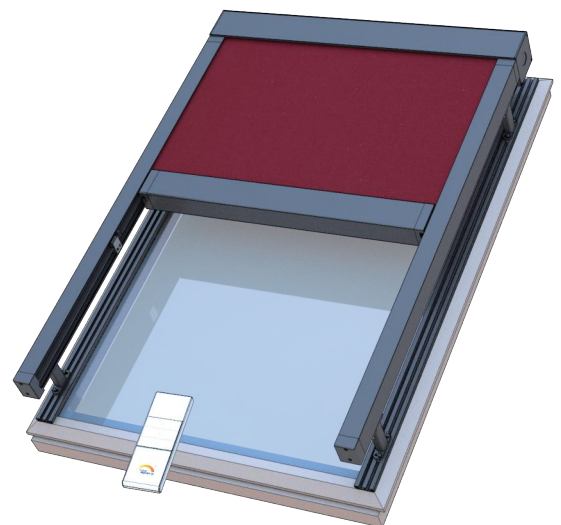

Product Details

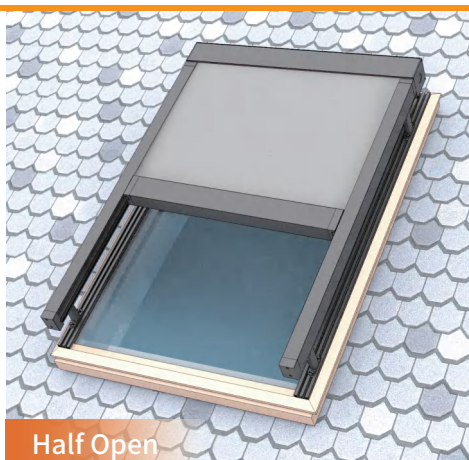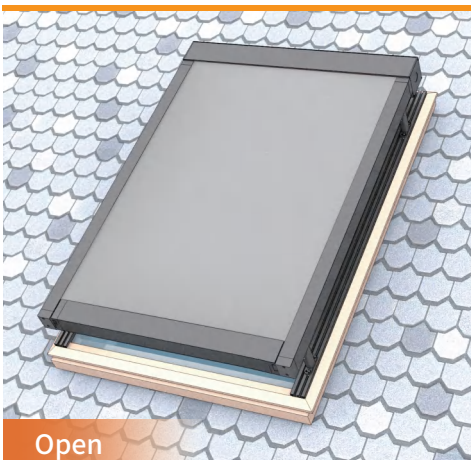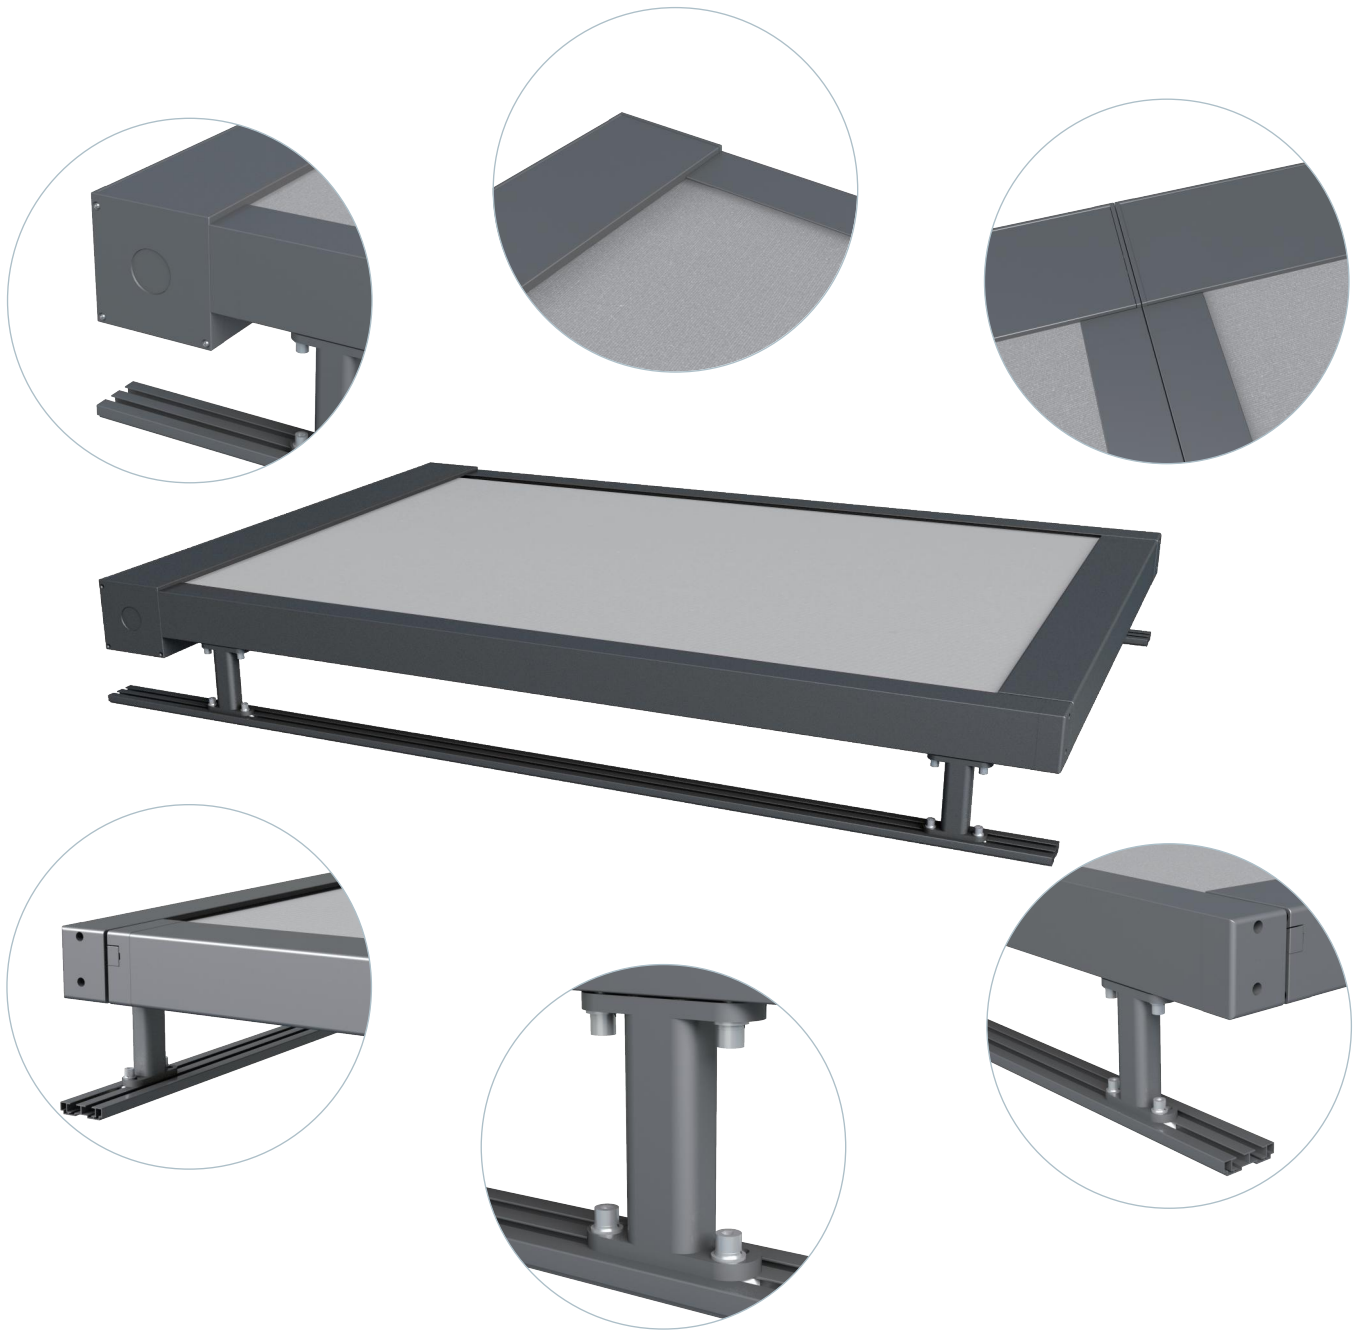

Product Components

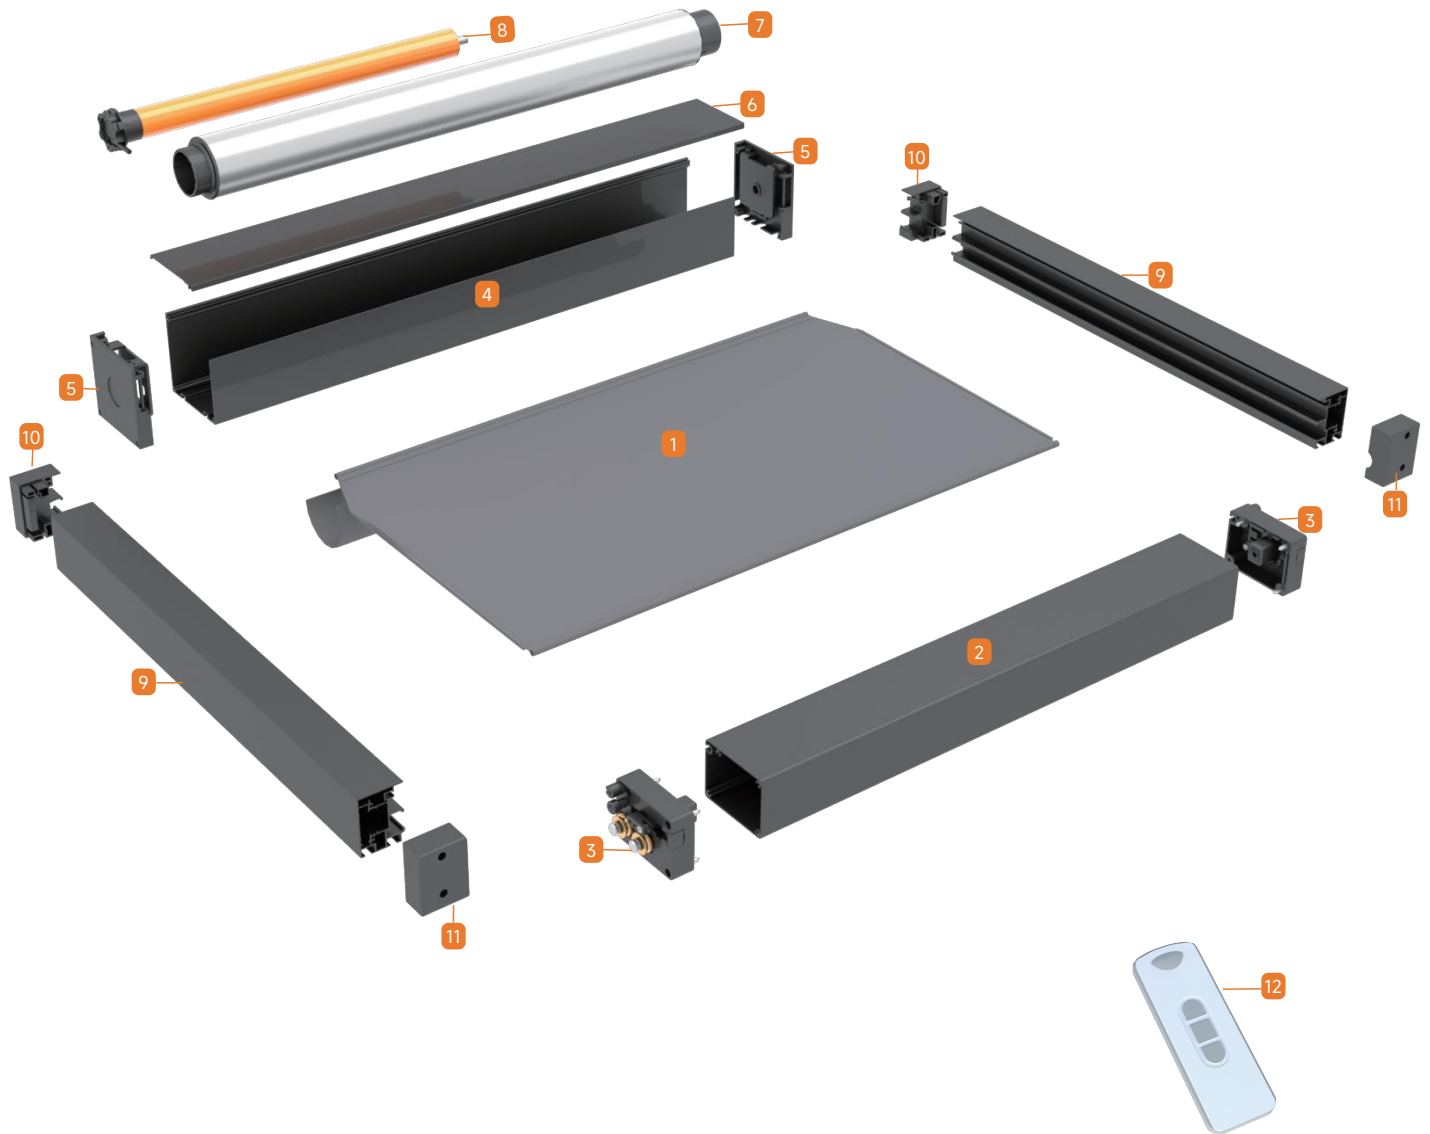


Accessories


- | | | |
|--------------------------------|-----------------------|-------------------------|
| 1 Fabric (Acrylic, Sun fabric) | 5 End cap of Cassette | 9 Side Rail |
| 2 Front Beam | 6 Cover for cassette | 10 Fabric guide cap |
| 3 End cap of Front beam | 7 Steel Roller | 11 End cap of Side rail |
| 4 Cassette | 8 Tubular motor | 12 Remote controller |

Profile dimensions


End cap

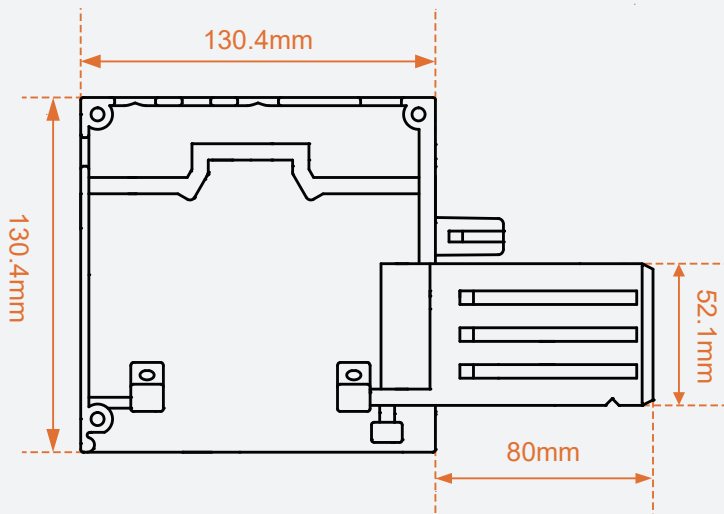


Cassette+Cover

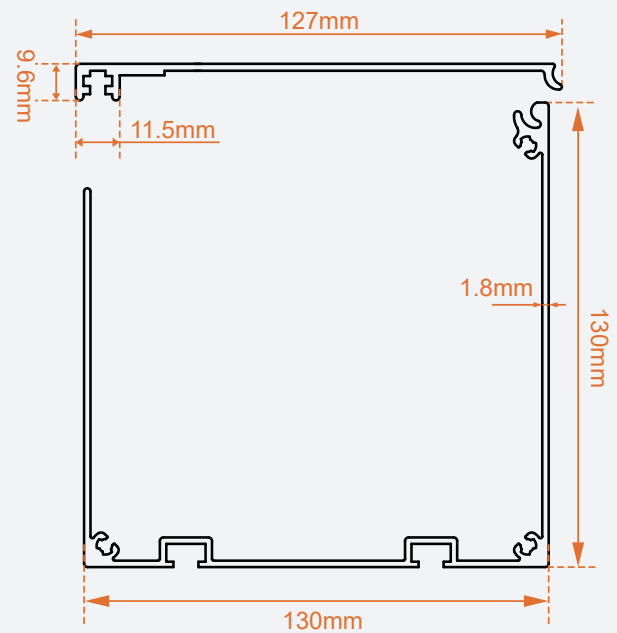


Guide Rail

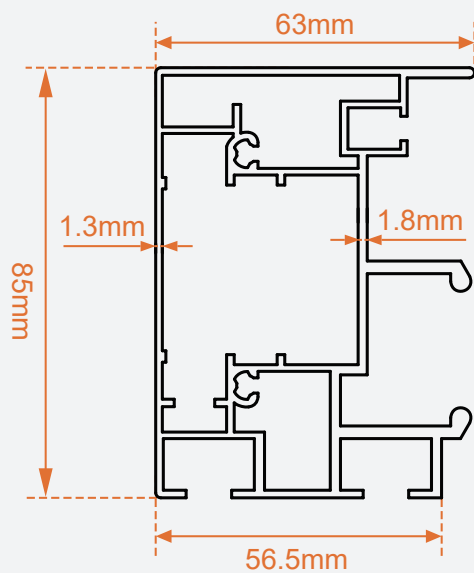


Front beam

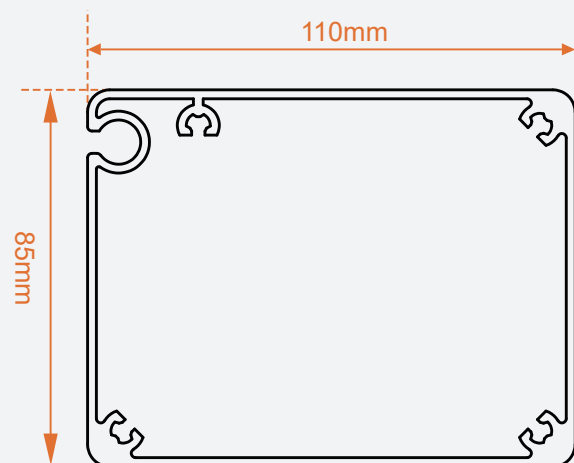


Rail support

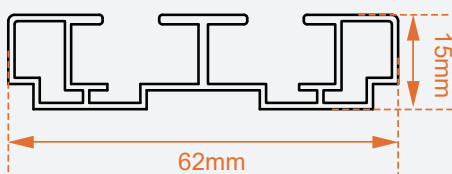

Bracket

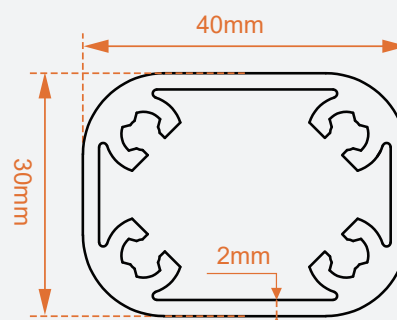


Steel Roller

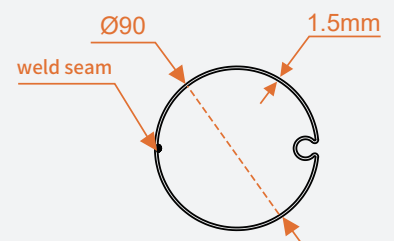

Product Parameters


Installation Nodes

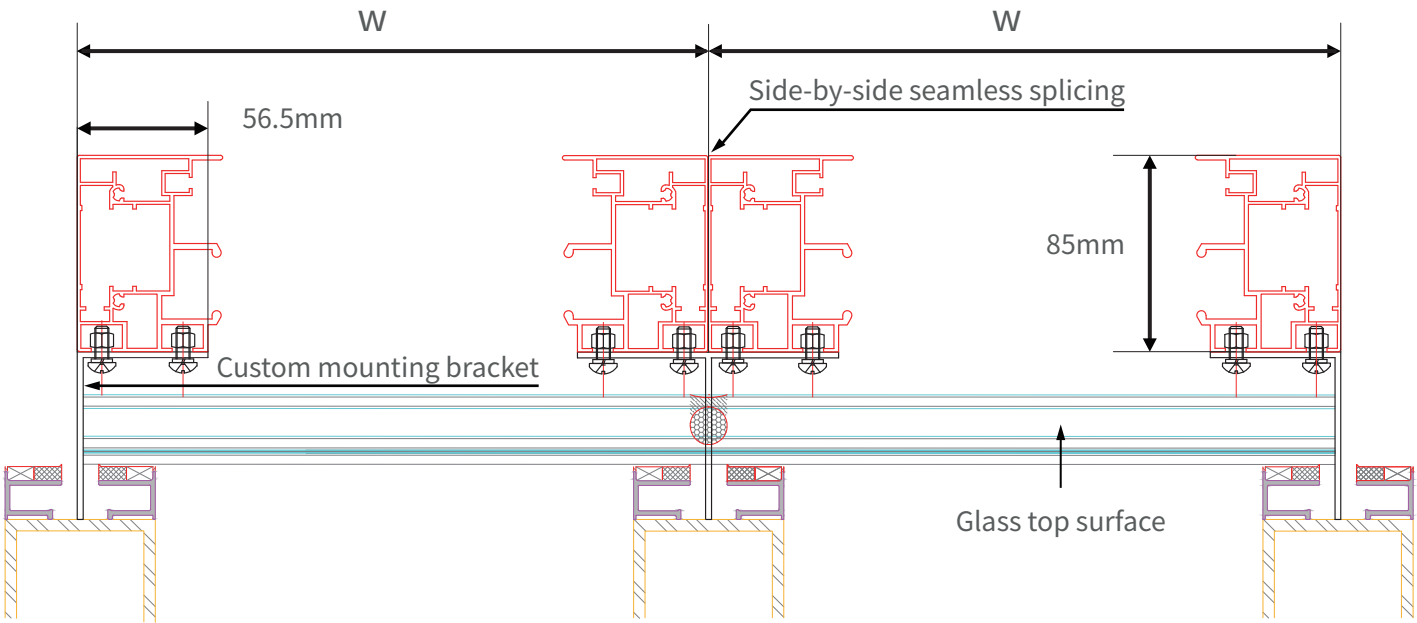

Product Parameters

Minimum size	1m×1m
Maximum size	5m×5m
Air resistance	38 km/h
Rated voltage/power	230V~ 50Hz/230W
Protection level	Withstands 10-level winds
Waterproof protection level	IP44
Wind resistance	72qkm/h
Protected species	IPX4
Voltage	220v
Power	80w
Load noise	45db
Motor thermal protection cooling time	15min
Diameter of steel roller	Width of 3m and below are Φ80 roller, width more than 3m are Φ90 roller.

Scope of application

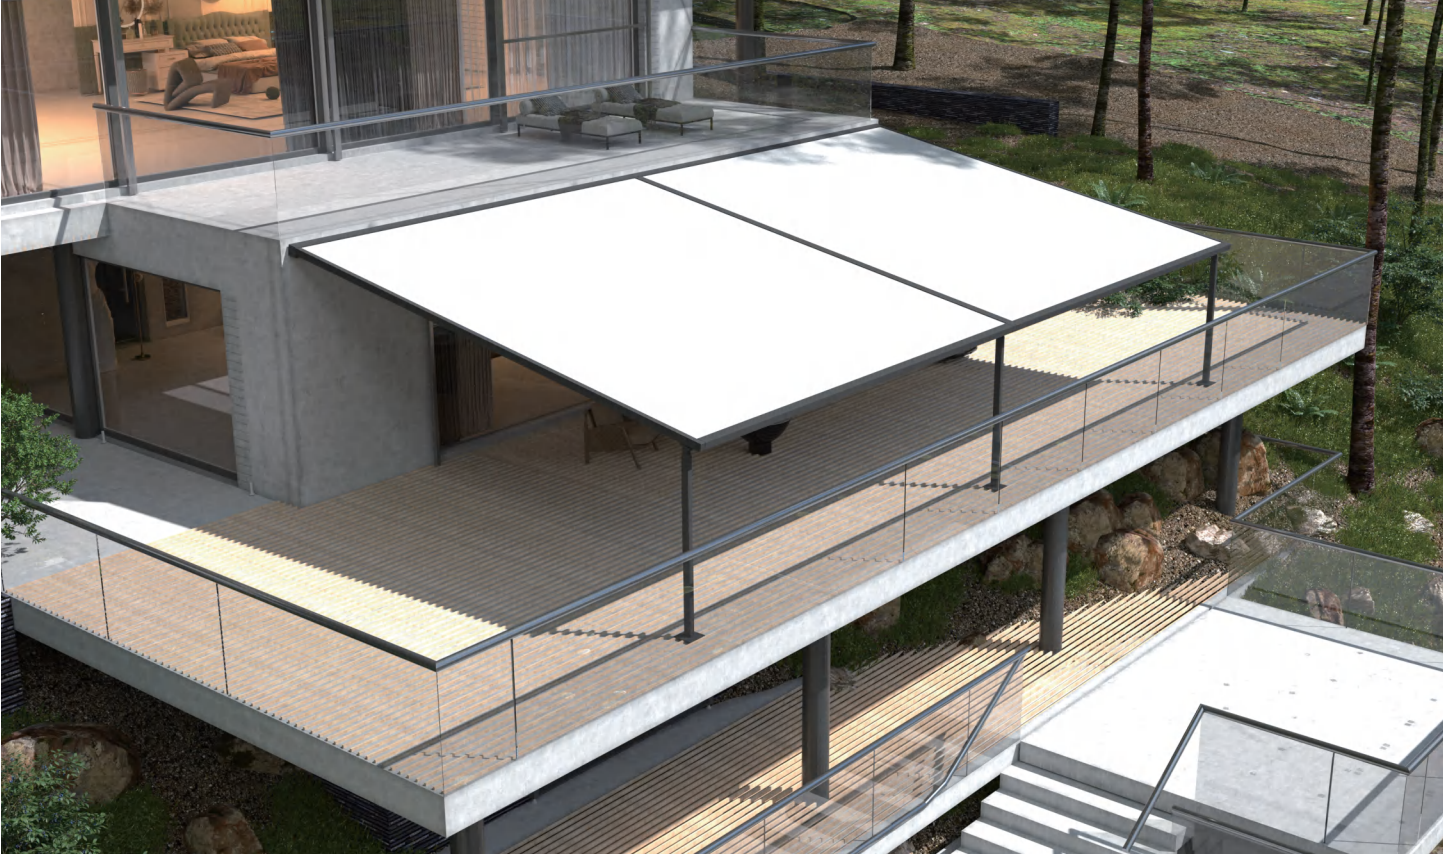

Scope of application:

Suitable for residential balconies, sunroom roofs, and storefront entrances as well as wall-side terraces.

Column-supported canopies work well in courtyards to create outdoor spaces, expand commercial operating zones and build public leisure areas.



Thank you for choosing COOLSPACE!
With premium products and exquisite designs,
COOLSPACE is dedicated to creating elegant, comfortable and refreshing spaces for you.
Your satisfaction is the endless driving force behind our product innovation.

Coolspace

Coolspace



Tianjin Lucheng

NO.3-14E, Yuhua Road, Wuzhuangzi Village Jingwu Town
Xiqing District, Tianjin, China
www.tj-lc.com