



This is how strong a simple
can be.

CoolSpace LCAG | The Strong one





Dimension

Max. 650×400cm

Folding Arm

Two Strong Tention Spring and Steel Wire

Options

Valance
Frame Color
Fabric Color
Alu coverboard
Bracket

CoolSpace LCAG | The Strong one

Coolspace LCAG model is the largest size no cassette folding arm awning you could find in Chinese supplier, 2mm thickness of square bar is basement of strongest structure.

2~5mm thickness arm and patent arm adjustment part gives the largest projection.


Exclusive Smart Rewind Motor Tech keep the fabric flat.

Optional Aluminium coverboard gives extra protection against bad weather.




Patent Adjustable Arm part

Not only offer flexible Adjustable arm angle (Max. 45°) but also strong enough for 4m projection

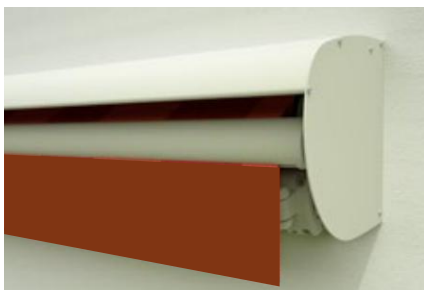

Aluminium Coverboard



Protect the fabric from dirt and rain when the awning is retracted

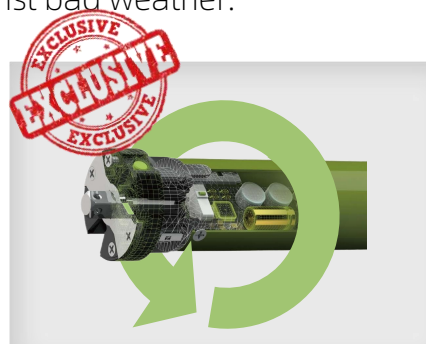

Smart Rewind Motor

Exclusive Smart Rewind technology make sure the fabric keep flat at all the time.
(after July, 2023)

luchengsystem.com

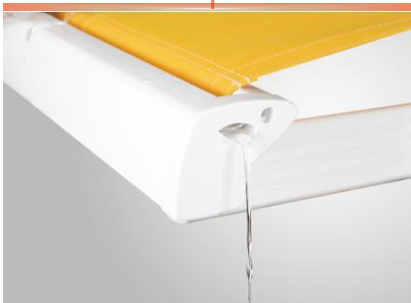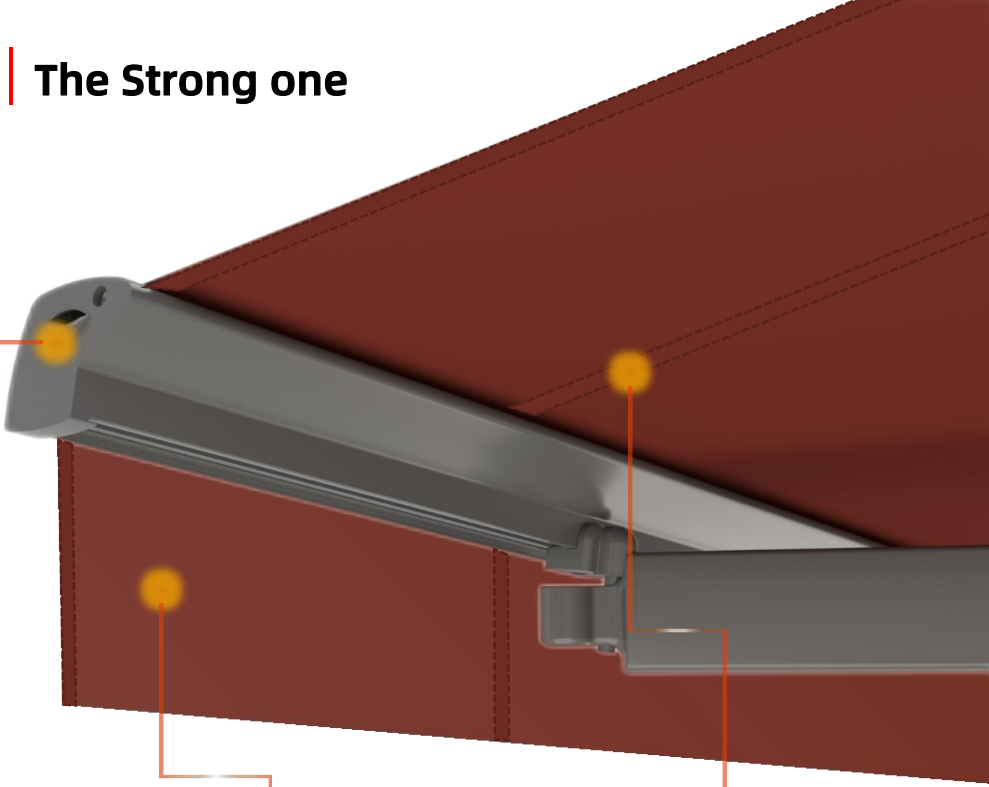

Drainage Channel

Unique drainage hole design avoids rainwater accumulation and waterfall phenomenon




Valance Option

Block out low-lying sun and prying eyes with the additional Valance in the front profile.

Shape
Wave & Rectangle

Fabric
Sun screen fabric
Acrylic
Polyester

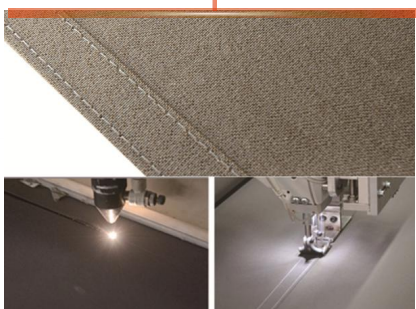

Fabric Processing


Full sets of self-developed intelligent cutting and sewing lines to ensure size and avoid any wrinkles.

A complete set of equipment can be exported

Fabric:
Acrylic & Polyester
(with PU coat, water resist)

Thread:
Anti-ultraviolet




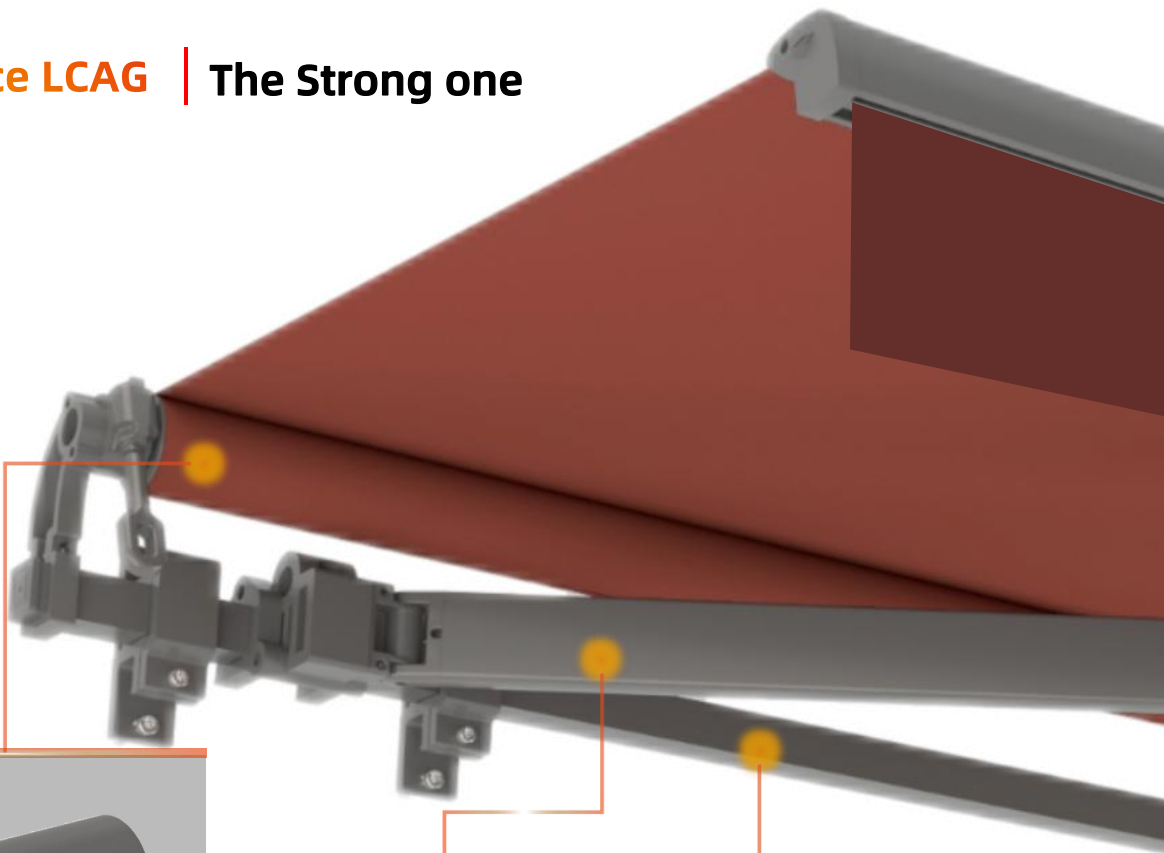

Steel Roller

Seamless welded steel Roller, anti-bending, anti-torsion, no collapse, good support for the maximum width of 7m.

Diameter
Φ80mm

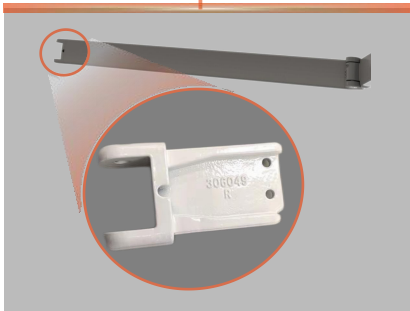


Back Folding Arm

strong profiles and high-strength steel castings connect part are the guarantee for 4 meters projection

Profile Thickness:
2~5mm

Connect part
Steel casting

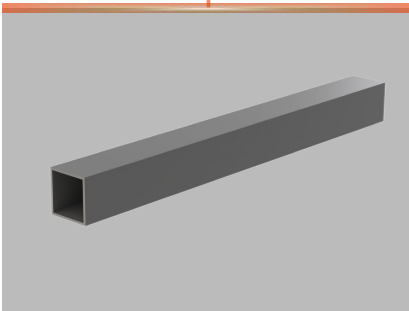



Square Bar

2mm thick high-strength steel , 4*4cm main beam make sure the strong structure for large size

Painting after cutting avoid rusting at the saw edge and run off with rainwater.

Material:
Steel

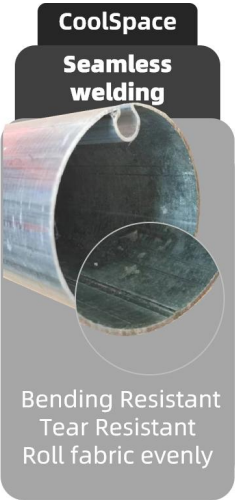

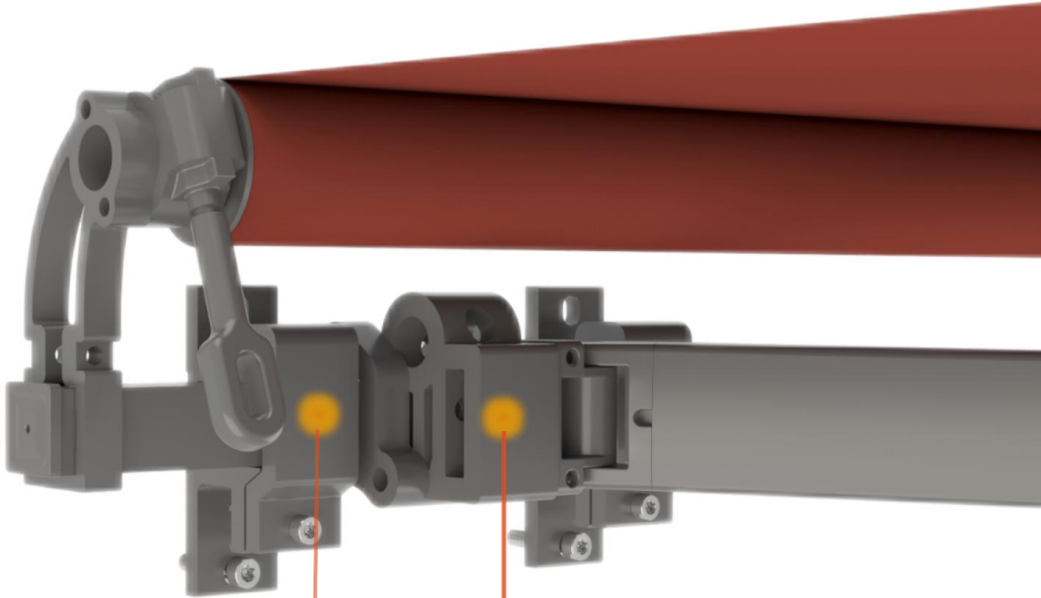

Wall Bracket

Two Wall Brackets embrace one arm to make sure the stable of huge force coming from large projection.


Optional:
Ceiling Bracket



Adjustable Tilt angle

Patent Tilt Angle structure allows large scale tilt adjustment.

Adjustable Tile Angle:
0~45 °


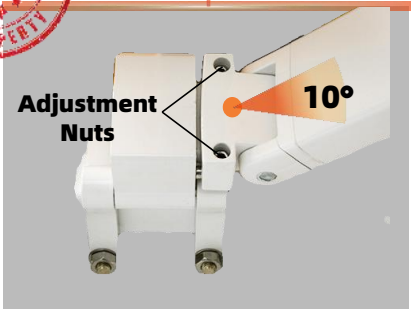


Adjustable Arm Balance system

Patent Adjustable balance system design will make sure the folding arms keep in the same line.

Application:
Convinient for clients who only buy component

Material:
Steel Casting

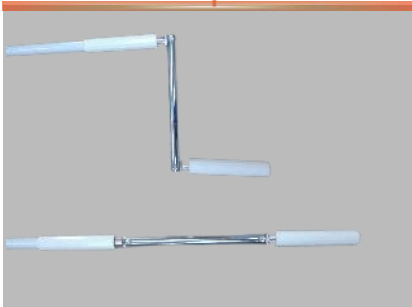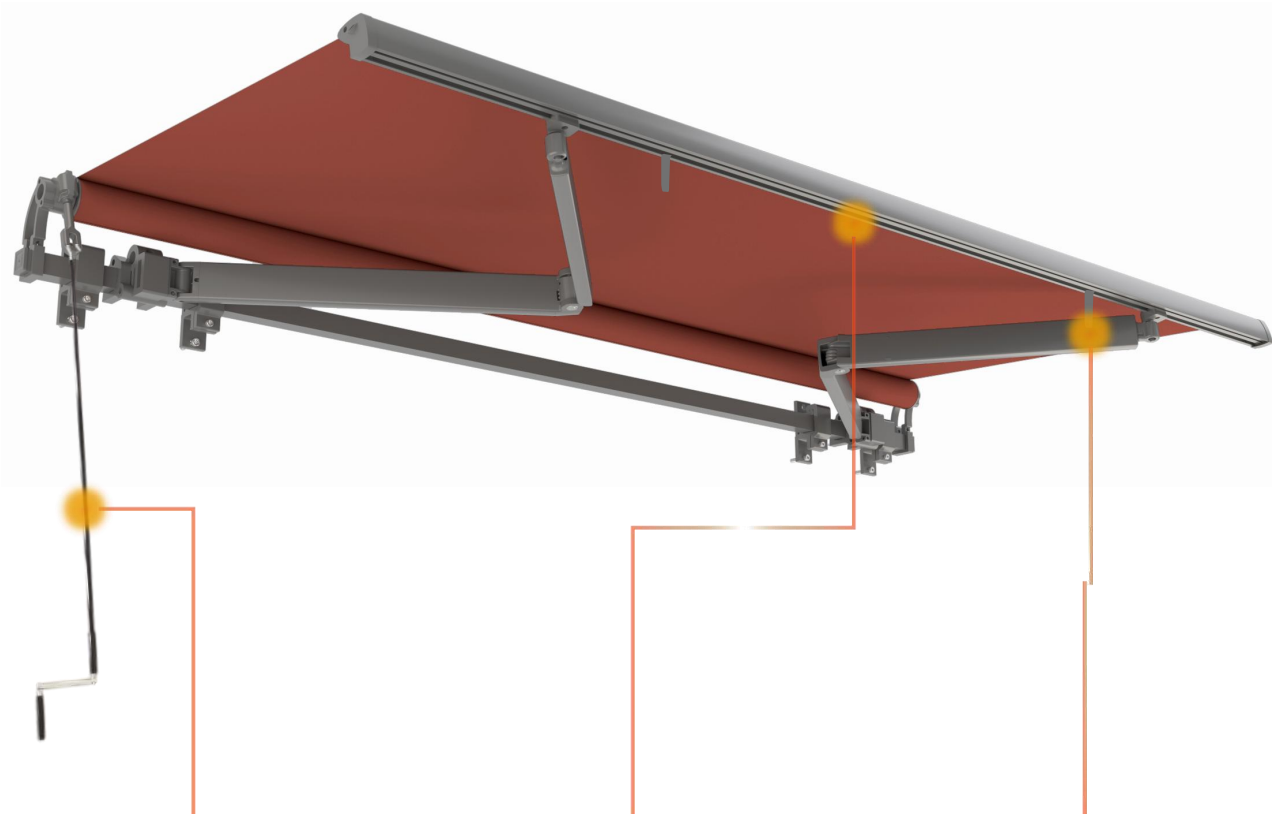


Foldable Handcrank

Steel foldable hand-crank.


Length:
1.5m 2.0m 2.5m

Color:
White Black

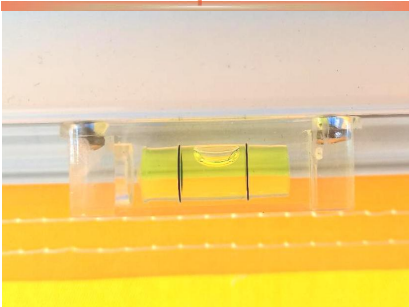


Level

This tool is used to help mounting so that the awning front beam is parallel to the ground

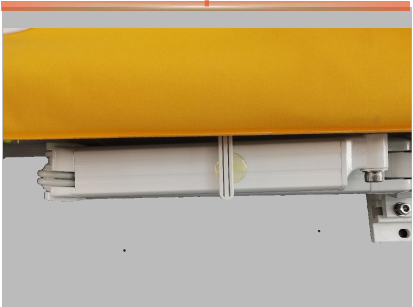

Folding Arm Blocker

Perfect limit the folding arm after retraction.

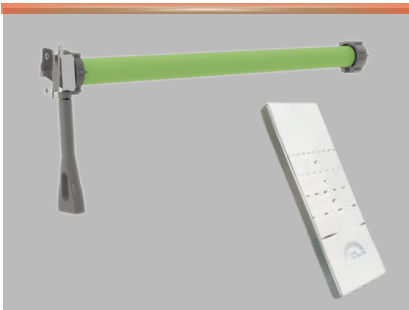


Motor with Manual Function


Remote control motor with Manual function in case there is no power

Smart Rewind Function
Optional

CoolSpace LCAG | The Strong one

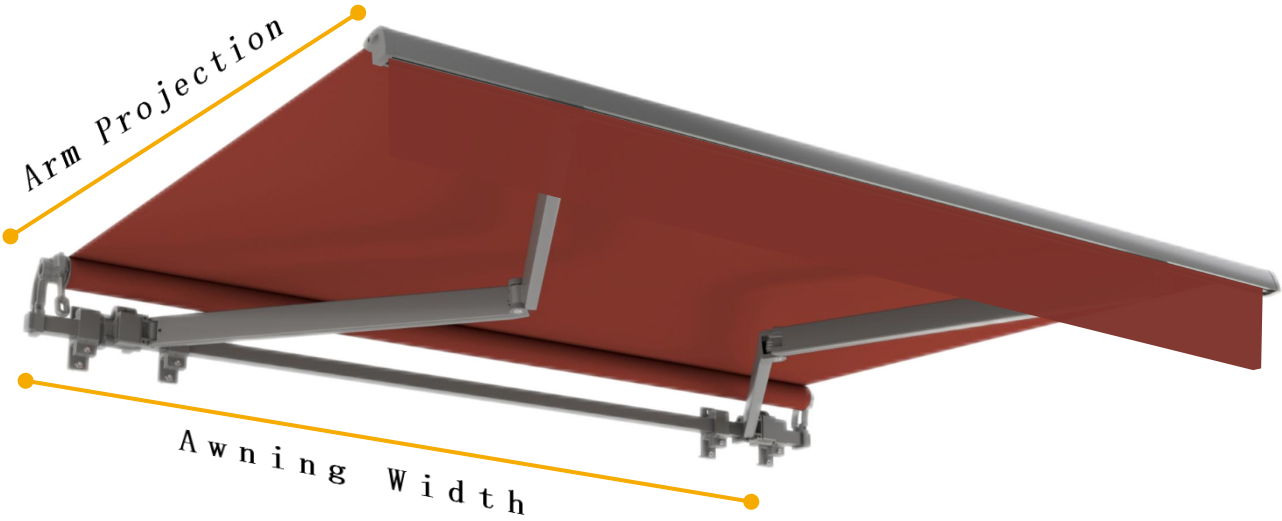

		Awning Width (cm)								
		250	300	350	400	450	500	550	600	650
Arm Projection(cm)	150									
	200									
	250									
	300									
	350									
	400									
Arm No.		2	2	2	2	2	2	2	2	3
Bracket No.		4	4	4	4	4	4	4	4	6

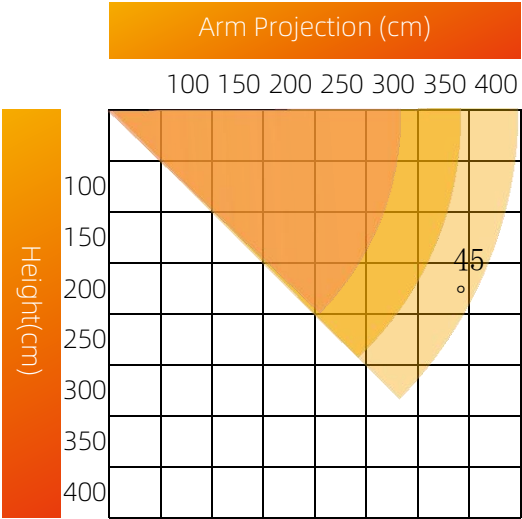



www.luchengsystem.com
<https://tj-lc.en.alibaba.com>

lcgs06@tj-lc.com

Tianjin Lucheng

Tianjin Lucheng

luchengsystem.com

